

Specifications

MODEL		GS™ -3384 RT	
MEASUREMENTS	Metric	US	
Working height maximum*	12.06 m	39 ft	
A Platform height maximum	10.06 m	33 ft	
B Platform length - standard	3.89 m	12 ft 8 in	
outside extended - single deck	5.34 m	17 ft 6.25 in	
outside extended - dual deck	6.57 m	21 ft 6.5 in	
outside extended - super deck	7.38 m	24 ft 2.5 in	
C Slide-out platform extension deck - front	1.52 m	5 ft	
D Slide-out platform extension deck - rear	1.22 m	4 ft	
E Platform width - outside	1.83 m	6 ft	
Platform height - stowed**	1.55 m	5 ft 1 in	
F Height - stowed: folding guardrails rails lowered	2.68 m / 2 m	8 ft 9.5 in / 6 ft 6.75 in	
G Length - stowed: single deck	3.94 m	12 ft 11.25 in	
dual deck	3.98 m	13 ft 5 in	
with outriggers	4.88 m	16 ft	
H Width	2.13 m	7 ft	
I Wheelbase	2.84 m	9 ft 4 in	
J Ground clearance - centre	33 cm	13 in	


PRODUCTIVITY		
Max platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger levelling****: front to back	7°	7°
side to side	12°	12°
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45/29 sec	45/29 sec
Controls	proportional	proportional
Drive	four wheel	four wheel
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

POWER		
Power source	Deutz diesel F3L 1011 49 hp (36 kW), air cooled Ford DSG-423 75 hp petrol/LPG (56 kW) air cooled	
Auxiliary power unit	12 V DC	12 V DC
Fuel tank capacity	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal

WEIGHT*****		
	5,781 kg	12,744 lbs
Unit weight modifiers for options		
Outriggers	add 848 kg	1,870 lbs
Single extension deck	add 191 kg	422 lbs
Dual extension decks	add 356 kg	784 lbs
Super deck	add 411 kg	906 lbs
Generator/Inverter	add 48 kg	105 lbs
Standard foam-filled RT tyres	add 432 kg	952 lbs
Foam-filled turf tyres	add 784 kg	1,728 lbs
Non-marking tyres	add 432 kg	952 lbs

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 2 in (5.8 cm) for turf and non-marking.
 *** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.
 **** Outriggers are optional
 ***** Weight will vary depending on options and/or country standards.

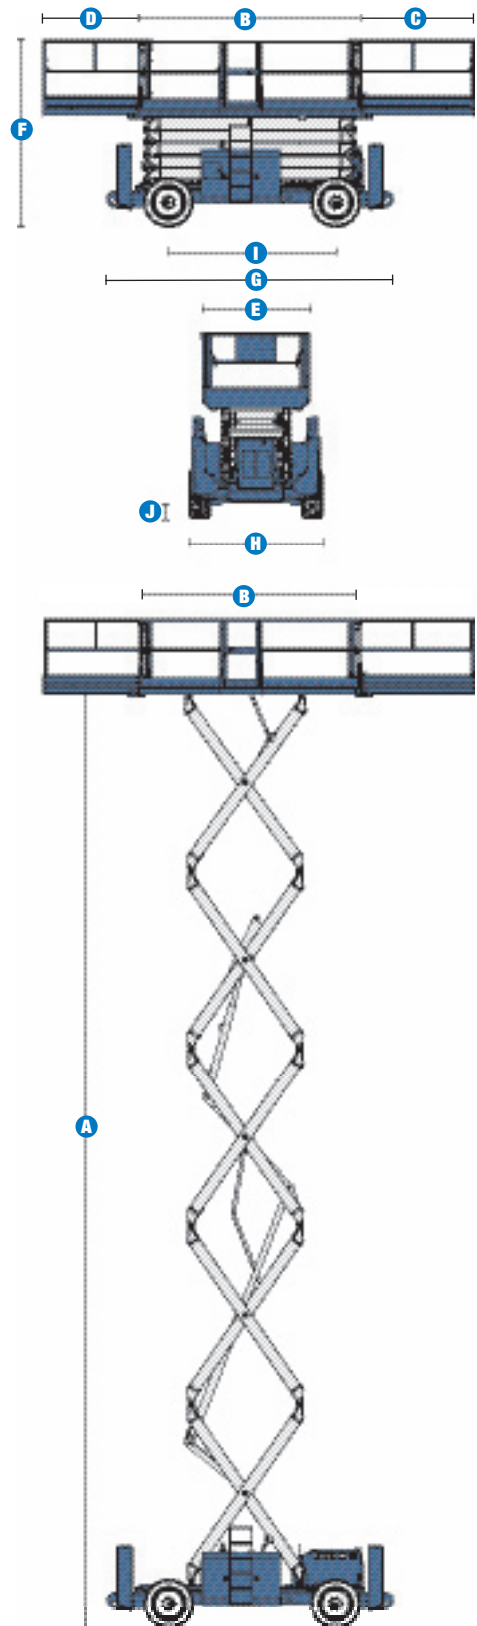

Features

STANDARD FEATURES

MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lb) lift capacity

PRODUCTIVITY

- 3.94 x 1.83 m (156.5 in x 72 in) steel platform
- 1.52 m (60 in) extension deck
- Diamond plate deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- Two self-closing gates
- 4x4
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

POWER

- Deutz diesel 49 hp (36 kW)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual slide-out platform extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- 7.38 m (24 ft 2.5 in) super deck extension package
- Automatic levelling hydraulic outriggers
- Air line to platform
- Non-marking foam filled tyres
- High flotation foam filled tyres
- Dual flashing beacons
- Motion alarm
- Platform work lights

POWER

- Ford petrol/LPG 75 hp (56 kW)
- 2000 watt generator (110V/60Hz)
- Deutz diesel 49 hp (36 kW)
- Cold start packages for all engines
- Hydraulic oil cooler
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- LPG steel tank only, 15 kg (33.5 lb) capacity
- Additional LPG tank carrier

UK

Millennium House
Brunel Drive
Newark NG24 2DE
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain

Gaià 31, Pol. Ind. Plá d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Importgatan 17
422 46 Hisings Backa
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Middle East

Terex Middle East
PO Box 282325, Dubai
U.A.E.
Tel: +971 4 339 1800
Fax: +971 4 339 1802
Email: InfoME@terex.com

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, WA
USA 98073-9730
Tel: +1 425 881-1800
Fax: +1 425 883-3475

Email: AWP-InfoEurope@terex.com

Distributed By: